

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 1 107 352 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:  
13.06.2001 Bulletin 2001/24

(51) Int Cl.<sup>7</sup>: H01Q 1/24, H01Q 1/22,  
H01Q 1/08, H01Q 21/28

(21) Application number: 00660214.8

(22) Date of filing: 23.11.2000

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Määttä, Esa-Sakari  
33710 Tampere (FI)

(74) Representative: Kaukonen, Juha Veikko  
Kolster Oy Ab,  
Iso Roobertinkatu 23,  
P.O. Box 148  
00121 Helsinki (FI)

(30) Priority: 03.12.1999 FI 992611

(71) Applicant: NOKIA MOBILE PHONES LTD.  
02150 Espoo (FI)

(54) Hinged electronic device of transmitter and/or receiver type with antennas

(57) A hinged electronic device (1, 1', 1'') comprising a base part (2), hinges (6, 6') and a cover part (3), the cover part (3) being arranged rotatably with relation to the base part (2) about the rotation axis (7) of the hinges

(6, 6'). The device (1, 1', 1'') also comprises at least one antenna structure (9, 9', 9'') to which is arranged an antenna (10, 18, 21) and which is arranged substantially concentrically with the rotation axis (7) of the hinges (6, 6').

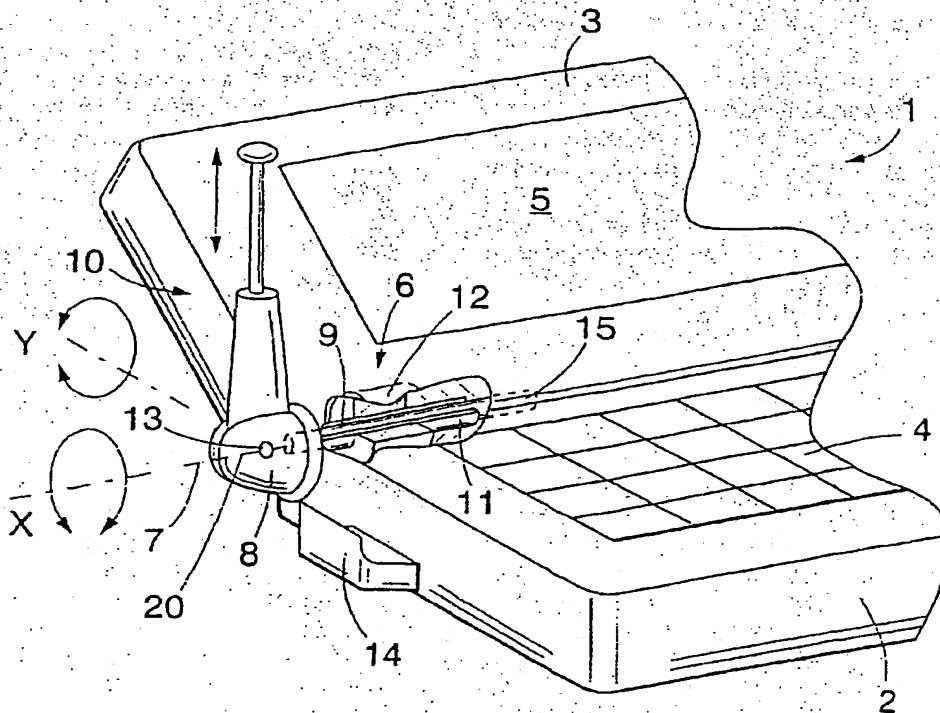


FIG. 1

EP 1 107 352 A2

## Description

[0001] The invention relates to a hinged electronic device of transmitter and/or receiver type, the device comprising a base part, hinges, a cover part that is arranged to be rotatable in relation to the base part about the rotation axis of the hinges, an antenna, an RF circuit and an RF conductor that is arranged to connect the RF circuit to the antenna.

[0002] Some electronic devices of transmitter and/or receiver type comprise a base part and a cover part that is rotatably attached thereto by hinge means. Such electronic devices - in the following referred to as the device - typically include mobile phones, portable computers or combinations thereof and the like. To improve portability and manageability of the device, for instance, the base part and the cover part of the device can be folded against one another. On the other hand, by folding the device open, i.e. the cover part apart from the base part, a display extending substantially throughout the cover part will be generally available for use, and correspondingly, a keyboard extending substantially throughout the base part. Nokia 9000 Communicator is known as an example of this kind of a device.

[0003] Electronic components of said devices are mainly arranged in the base part, whereas a display and possibly some of the operating means are commonly arranged in the cover part. An antenna or antennae of the devices are also arranged in the cover part, because in a position in which the device is normally used, i.e. the base part set in a substantially horizontal position and the cover part lifted upwardly, the cover part takes a more advantageous position in view of the antenna operation.

[0004] Conductors are arranged between the base part and the cover part for interconnecting the electronic components placed in different parts in a required manner. Bending stress in particular, but also other mechanical stresses are exerted on said conductors every time the angle between the base part and the cover part is changed. The stress is often increased by minor bending radii of the conductors. In particular, the typically coaxial RF cable that interconnects the antenna structure and the RF (Radio Frequency) circuit is easily damaged by said bending stress. Sooner or later, damages in the RF cable lead to disturbances essentially impeding the operation of the device or even to complete inoperability. Furthermore, the angle of rotation between the base part and the cover part has to be limited so as to reduce the bending of the RF cable, and consequently, depending on the device or the device type, it is not necessarily possible to open the device such that the operating position would be ideal in view of ergonomics and working environment. Still further, when assembling the device, installing the RF cable from the base part to the cover part during assembly is a cost intensive step requiring particularly great precision and carefulness. Correspondingly, handling of the conductor is often difficult in

connection with maintenance or repair measures.

[0005] WO 97/23936 discloses a solution, which aims to reduce bending stress exerted on the conductors by supplying the conductors from the base part to the cover part through a rotatable connecting piece that reduces their bending angle. Even though the solution according to the publication works well as compared with previous solutions, the RF conductor is still subjected to bending stresses that may result in conductor damage in time. Moreover, it is relatively laborious to install an RF conductor in connection with this solution as well.

[0006] The object of the present invention is to provide a hinged electronic device which avoids the above-described drawbacks.

15 [0007] The hinged electronic device of the invention is characterized by comprising an antenna structure to which an antenna is arranged, the antenna structure being arranged substantially immobile in relation to the device part comprising the RF circuit such that the centre axis of the antenna structure is substantially concentric with the rotation axis of the hinges.

20 [0008] The basic idea of the invention is that the device's antenna structure, to which the RF conductor is coupled, is arranged concentrically with the rotation axis of the hinges between the base part and the cover part such that when the cover part is rotated in relation to the base part about said rotation axis, the antenna will not rotate substantially in relation to the base part, whereby the RF conductor is not subjected to substantial bending stresses caused by rotation. Further, the idea of one preferred embodiment is that said antenna structure and a pivot pin of at least one hinge are integrated, whereby the number of device components can be reduced. Still further, the basic idea of a second preferred embodiment is that at least one external antenna is arranged with a joint to the antenna structure, allowing the antenna to rotate about at least one spatial axis in relation to the antenna structure. The idea of yet a third preferred embodiment is that an internal antenna is arranged to the antenna structure.

30 [0009] The invention has an advantage that when rotating the cover part in relation to the base part, the RF conductor is not subjected to bending stresses caused by the rotation nor to damage resulting therefrom, whereby service life and reliability of the RF conductor improve. Moreover, the assembly of the device becomes easier and simpler, because there is no need to pass the conductor through from the base part to the cover part, and regarding the length and installation of the conductor, there is no need to take into account how the conductor behaves in rotation. It is also easier to maintain and repair the device, because the RF conductor runs all the time in one and the same part of the device. Yet another advantage is that there is no need to limit the angle of rotation between the base part and the cover part because of the RF conductor. An advantage of one preferred embodiment is also that the antenna and the pivot pin being integrated the number of com-

ponents reduces, which reduces the amount of installation measures required in assembly and costs resulting from component handling.

**[0010]** The invention will be described in greater detail with reference to the attached drawings, wherein

Figure 1 is a schematic view of a part of one embodiment of the device in accordance with the invention in perspective and partly cut open;

Figure 2 is a schematic side view of a second embodiment of the device in accordance with the invention partly cut open; and

Figure 3 is a schematic side view of a third embodiment of the device in accordance with the invention partly cut open.

**[0011]** Figure 1 is a schematic perspective view of a part of a hinged electronic device in accordance with the invention. The main parts of the device 1 comprise a base part 2 and a cover part 3 arranged on the upper edge of said base part. Typically, a keyboard 4 and other similar means required for operating the device are arranged in the base part 2; a majority of the electronic components of the device 1 is also generally arranged in the base part 2. A display 5, which is of the type of a liquid crystal display or a similar flat-panel display, is in turn arranged in the cover part 3. Disposition of the components of the device 1 can also be different from what is presented here. For instance, the cover part 3 can be arranged on either side of the base part 3 or on the lower edge thereof; the keyboard 4 can be arranged either completely or partly in the cover part 3. Displays, keyboards, switches or other components known per se can be arranged on the outer surfaces - not shown in the figure - of the base part 2 and the cover part 3. It should also be noted that the device of the invention may comprise more parts rotatable in relation to one another than one base part 2 and one cover part 3.

**[0012]** The base part 2 and the cover part 3 are arranged rotatably to one another by hinges 6 which are arranged between the base part 2 and the cover part 3 in a suitable manner. The hinge 6 comprises a hollow, cylindrical pivot pin 11 attached substantially immovably to the base part 2 and a hinge sleeve 12 arranged rotatably about said pivot pin; the hinge sleeve 12 being in turn secured to the cover part 3. Thus, the cover part 3 can be rotated in relation to the base part about the pivot pin 11, the rotation axis 7 being at the center axis of the pivot pin. An opposite arrangement is also possible, whereby the hinge sleeve 12 is secured to the base part 2 and the pivot pin 11 to the cover part 3. The hinge 6 can also be implemented in other manners known per se to the person skilled in the art. The material of the hinge sleeve 12 is in most cases metal or reinforced or non-reinforced plastic. To interconnect the components arranged in the base part 2 and the cover part 3, conductors and buses are arranged between the parts 2, 3 in a manner known per se, which conductors and buses

are not shown in the figure 1, however, for the sake of clarity.

**[0013]** In the embodiment of Figure 1, the pivot pin 11 is a hollow, tube-like means which is most preferably made of metal or reinforced or non-reinforced plastic and which is locked in a known manner to the base part 2. An antenna structure 9 of the device 1 is arranged substantially immovably inside the pivot pin 11 to be coaxial in such a manner that the center axis 20 of the antenna structure 9 is substantially at the rotation axis 7 of the hinge 6. The antenna structure 9 is connected with an RF conductor to an RF circuit in the base part 2 of the device. It should be noted that for the sake of clarity Figure 1 does not show the RF conductor, nor the RF circuit, but these components are known per se to the person skilled in the art. The RF conductor is typically a coaxial cable which is connected at one end to said RF circuit and at the other end to the antenna structure 9. In the embodiment shown in the figure, the RF conductor is connected to the opposite end of the antenna structure 9 with relation to a joint 8. Since the antenna structure 9 is arranged to be substantially immovable in relation to the pivot pin 11 and further the base part 2, the RF conductor is not subjected to any bending stresses or other mechanical strains when the cover part 3 is rotated in relation to the base part 2. Consequently, the RF conductor will not be damaged mechanically and the reliable service life will increase substantially as compared with the prior art solutions. To pass the RF conductor from the base part to the cover part, which is known as a particularly time-consuming step in the assembly of prior art devices, becomes unnecessary, which reduces assembly costs of the device. Correspondingly, said step will be omitted, for instance, in such maintenance or repair measures that require detaching the cover part 3 from the base part 2.

**[0014]** Instead of the hinge solution implemented in the embodiment of Figure 1, the pivot pin 11 can be locked in the hinge sleeve 12, whereby the ends of the pivot pin 11 are arranged rotatably in mating recesses provided in the base part 2. In that case, the antenna structure 9 is secured directly to the base part 2 and the pivot pin 11 rotates about it.

**[0015]** A joint 8 is rotatably secured to one end of the antenna structure 9, to which joint is arranged an external antenna 10 such that the position of said external antenna and the antenna structure 9 can be adjusted in relation to one another about the axis of the joint 13. Moreover, since the joint 8 is rotatably arranged in relation to the antenna structure 9 and hence also in relation to the base part 2, the position of the external antenna 10 can be adjusted in relation to two perpendicular spatial axes X and Y. Furthermore, the external antenna 10 has a telescopic structure, which allows length adjustment as well. All in all, there are extremely versatile possibilities to adjust the external antenna 10, which enables optimization of transmission and/or reception characteristics of the device to meet the needs at all times.

It should be noted in this connection that the dimensions of the antenna structure 9 and the external antenna 10 shown in the figure, like all other dimensions of the device 1, are given by way of example only.

[0016] A holder 14 is provided on one side of the base part 2 for the external antenna 10, in which holder the external antenna can be arranged so that it is firmly and reliably protected, for instance, during transportation of the device 1.

[0017] Figure 1 does not show other hinges of the device 1, which are arranged between the base part 2 and the cover part 3 in the device 1 in the same manner as the hinge 6. Their structure is similar to known hinges, and an antenna is not necessarily arranged in connection therewith. In some embodiments of the device 1, due to the extent of the device's field of use, or for some other reason, it is necessary to use a second antenna in addition to the external antenna 10. In that case, the second antenna can be placed in connection with the other hinge in the same manner as the external antenna 10 but on the opposite edge of the device 1.

[0018] Figure 2 shows a schematic side view of a second embodiment of the device of the invention partly cut open. The device 1' is shown such that the base part 2 and the cover part 3 are folded against one another. The base part 2 and the cover part 3 are arranged rotatably with one another by two hinges 6', the hinge sleeve 12 of the hinges 6' being secured to the cover part 3. The hinges 6' have no separate pivot pins but the antenna structure 9' serves as the pivot pin for both hinges 6'. In other words, the antenna structure 9' of the device 1' is integrated with the pivot pins and the antenna structure 9' extends through both of the hinges 6' such that the center axis 20 of the antenna structure 9' is coaxial with the rotation axis 7 of the hinges 6'. Thanks to the integration of the antenna structure 9' and pivot pins, the device 1' can be constructed without separate pivot pins. This reduces the number of components in the device 1', which in turn reduces the manufacturing and logistic costs of the device 1'. Even though the number of hinges 6' in the embodiment of Figure 2 is two, any number of hinges is possible. The RF conductor 16 is connected to one end 15 of the antenna structure 9' and to the RF circuit 17 in a manner known per se.

[0019] In the embodiment of Figure 2, the antenna structure 9' acts also as an internal antenna 21 of the device 1'. Thus, the device 1' comprises two antennae: an external antenna 10 and an internal antenna 21. One reason for comprising the internal antenna 21 in addition to the external antenna 10 can be, for instance, that the device 1' operates in two different frequency bands, the external antenna 10 being optimized to operate in one band, and correspondingly, the internal antenna 21 in the other frequency band, or then there is some other reason.

[0020] In one embodiment of the invention, the device comprises only an internal antenna 9' and no external antenna 10 at all. Then, outside the device there are no

protruding antennae which in some cases may impede the handling of the device, or which may be exposed to damage from impacts or other similar forces outside the device.

[0021] Figure 3 shows a schematic side view of a third embodiment of the device of the invention partly cut open. The antenna structure 9'' is arranged concentrically with the rotation axis of the hinges 6. A retractable antenna 18 is arranged inside the antenna structure 9'', which retractable antenna can be extended from the antenna structure 9'', when needed. On the other hand, while being pushed inside the antenna structure 9'' and the device 1'', the retractable antenna 18 is well protected against damage caused by outside factors.

[0022] Apart from the retractable antenna 18, the device 1'' comprises a second antenna 19. Even though the second antenna 19 in the embodiment of Figure 3 has a prior art structure, it can also be implemented in accordance with the present invention.

[0023] The drawings and the specification related thereto is only intended to illustrate the inventive idea. The invention may vary in detail within the scope of the claims. So, the device may comprise more than two antennae, of which some can be prior art antennae. The RF circuit 17 of the device 1 may also be arranged in the cover part 3, whereby the antenna structure 9, 9', 9'' of the invention is naturally arranged to be immovable in relation to said cover part 3.

## Claims

1. A hinged transmitter- and/or receiver-type electronic device, the device (1, 1', 1'') comprising a base part (2), hinges (6, 6'), a cover part (3) that is arranged rotatably with relation to the base part (2) about the rotation axis (7) of the hinges (6, 6'), an antenna (10, 18, 21), an RF circuit (17) and an RF conductor (16) that is arranged to connect the RF circuit (17) to the antenna (10, 18, 21), **characterized** in that the device (1, 1', 1'') comprises an antenna structure (9, 9', 9'') to which the antenna (10, 18, 21) is arranged and which antenna structure (9, 9', 9'') is arranged to be substantially immobile with relation to the part (2, 3) of the device (1, 1', 1'') comprising the RF circuit (17) such that the center axis (20) of the antenna structure (9, 9', 9'') is substantially coaxial with the rotation axis (7) of the hinges (6, 6').
2. A device as claimed in claim 1, **characterized** in that the antenna structure (9') comprises an internal antenna (21) of the device (1').
3. A device as claimed in claim 1 or 2, **characterized** in that a pivot pin (11) of at least one hinge (6, 6') to be inserted in a hinge sleeve (12) is arranged to envelop at least part of the antenna structure (9, 9', 9'').

4. A device as claimed in claim 1, characterized in that the antenna arranged in the antenna structure (9, 9', 9'') is an external antenna (10).
5. A device as claimed in claim 4, **characterized in** that the external antenna is a retractable antenna (18).
6. A device as claimed in claim 4 or 5, **characterized** in that the antenna structure (9'') is arranged to be the pivot pin of at least one hinge sleeve (12).
7. A device as claimed in any one of claims 4 to 6, **characterized** in that the external antenna (10) is arranged in the antenna structure (9) with a joint (8) such that the external antenna is rotatable about at least one spatial axis with relation to the antenna structure (9).
8. A device as claimed in claim 7, **characterized in** that the external antenna (10) is arranged rotatable about two spatial axes (X, Y) perpendicular to each other.
9. A device as claimed in any one of preceding claims, **characterized** in that the antenna structure (9, 9', 9'') is at least partly hollow and at least part of the RF conductor (16) is arranged inside said antenna structure.
10. A device as claimed in any one of preceding claims, **characterized** in that the device (1, 1', 1'') comprises at least two antennae (10, 18, 19, 21).

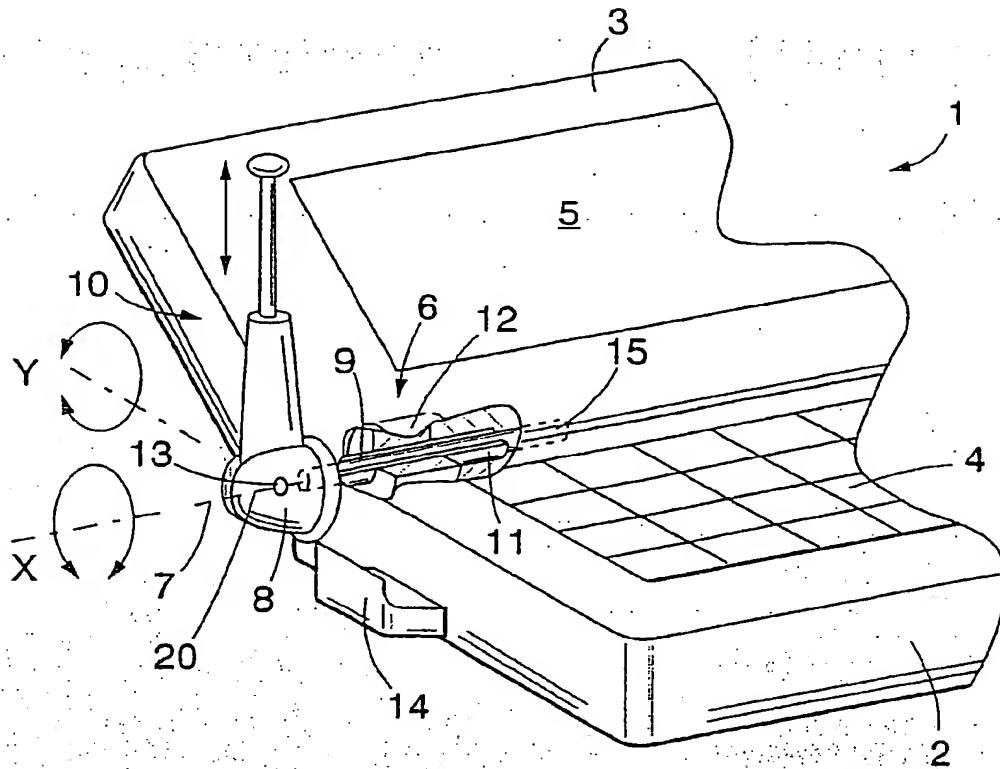


FIG. 1

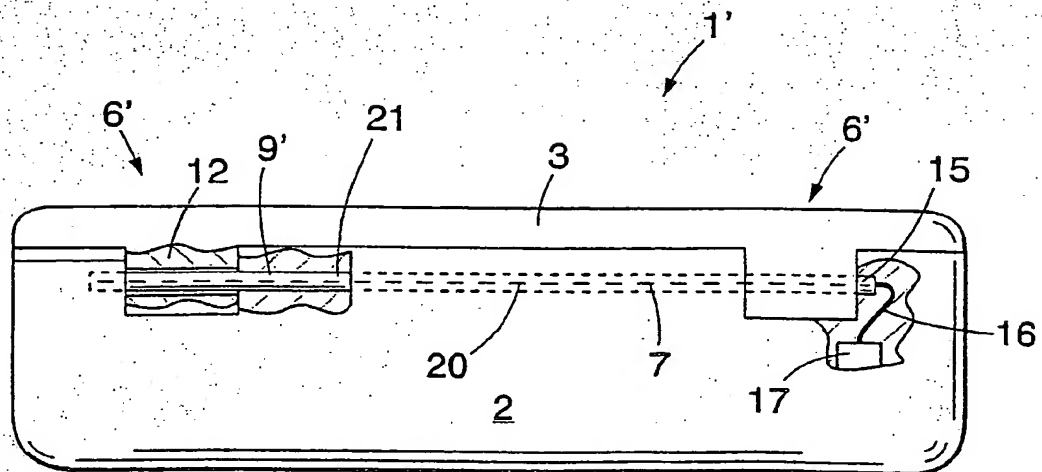


FIG. 2

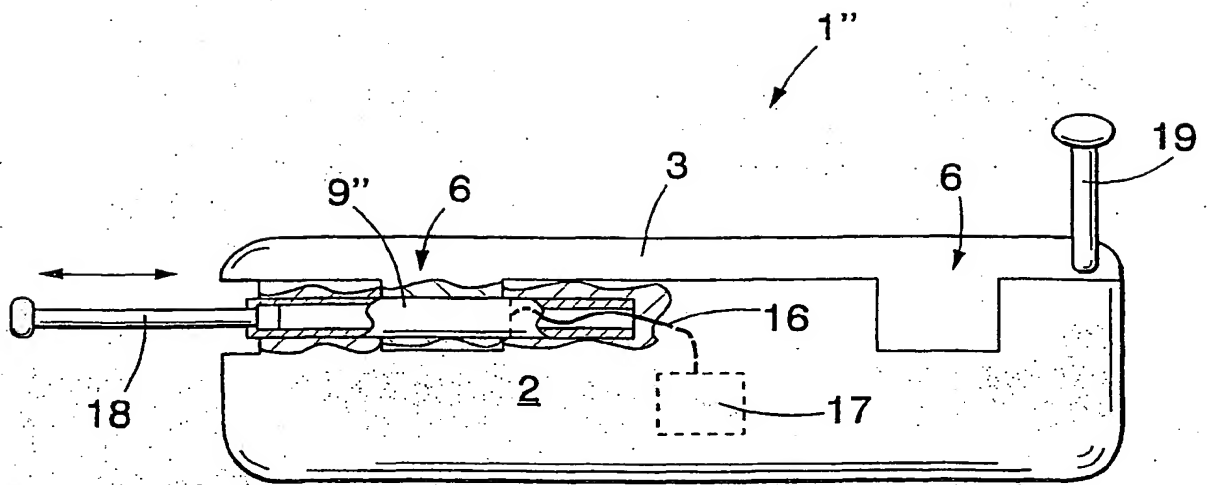


FIG. 3

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 107 352 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
20.02.2002 Bulletin 2002/08

(51) Int Cl.7: **H01Q 1/24**, H01Q 1/22,  
H01Q 1/08, H01Q 21/28

(43) Date of publication A2:  
13.06.2001 Bulletin 2001/24

(21) Application number: 00660214.8

(22) Date of filing: 23.11.2000

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **Määtä, Esa-Sakari**  
33710 Tampere (FI)

(74) Representative: **Kaukonen, Juha Veikko**  
Kolster Oy Ab, Iso Roobertinkatu 23, P.O. Box  
148  
00121 Helsinki (FI)


(30) Priority: 03.12.1999 FI 992611

(71) Applicant: **NOKIA MOBILE PHONES LTD.**  
02150 Espoo (FI)

**(54) Hinged electronic device of transmitter and/or receiver type with antennas**

(57) A hinged electronic device (1, 1', 1'') comprising a base part (2), hinges (6, 6') and a cover part (3), the cover part (3) being arranged rotatably with relation to the base part (2) about the rotation axis (7) of the hinges

(6, 6'). The device (1, 1', 1'') also comprises at least one antenna structure (9, 9', 9'') to which is arranged an antenna (10, 18, 21) and which is arranged substantially concentrically with the rotation axis (7) of the hinges (6, 6').

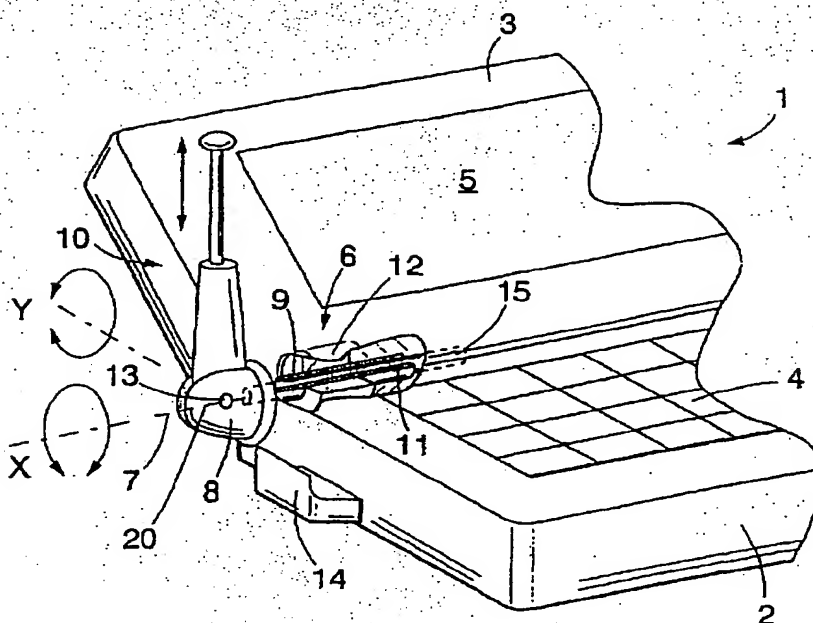

**FIG. 1**





European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 66 0214

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 93 18591 A (MOTOROLA INC) 16 September 1993 (1993-09-16) * the whole document *	1,3-7,9	H01Q1/24 H01Q1/22 H01Q1/08 H01Q21/28
X	US 4 126 863 A (KOLWAITE J) 21 November 1978 (1978-11-21) * the whole document *	1,3-7,9	
A	WO 99 14817 A (QUALCOMM INC) 25 March 1999 (1999-03-25) * abstract *	1-10	
			TECHNICAL FIELDS --SEARCHED (Int.Cl.7)
			H01Q
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>20 December 2001</b>	Examiner <b>Wattiaux, V</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 (P4/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 66 0214

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-12-2001

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO 9318591	A	16-09-1993	WO	9318591 A1	16-09-1993
US 4126863	A	21-11-1978	GB	1568956 A	11-06-1980
WO 9914817	A	25-03-1999	US	6107969 A	22-08-2000
			AU	9662098 A	05-04-1999
			WO	9914817 A1	25-03-1999

EPO FORM PD459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**